


URM 8-fold Connector

Features



- High modularity
- High density
- High flexibility
- Easy to handle
- Easy to install

Use

- Networking

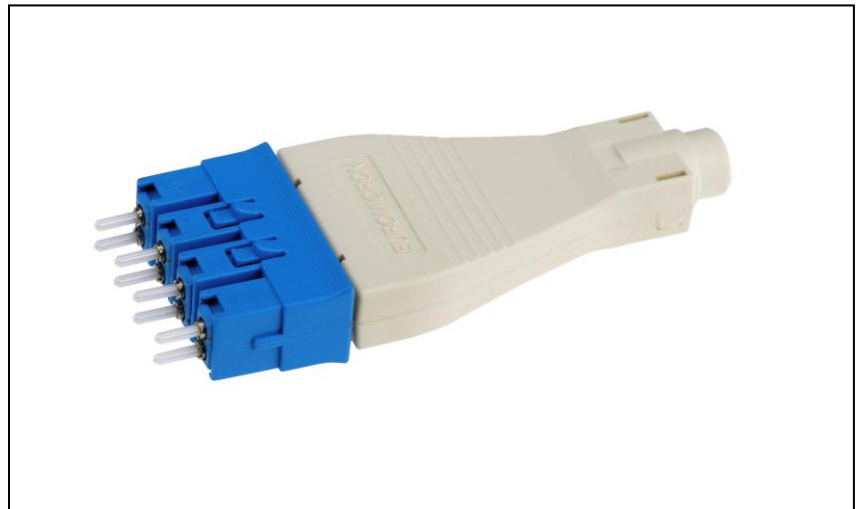

Dimensions

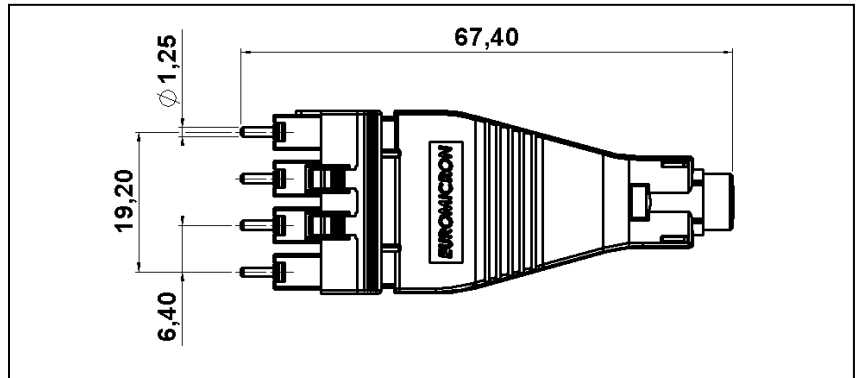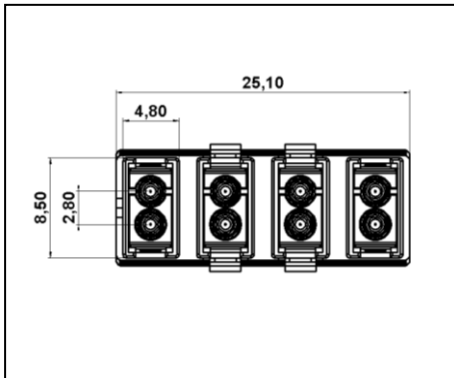

Technical Data

Part number	Single components		
	Multimode	Singlemode	APC
Description			
Housing material / colour	plastic / beige	plastic / blau	plastic / green
Typical loss* IL/RL	≤ 0.2 dB	≤ 0.15 dB / ≥ 50 dB	≤ 0.1 dB / ≥ 60 dB
Ferrule hole Ø	128 µm	126 µm	126 µm
Ferrule material	ZrO ₂		
Mating cycles	1.000		
Ferrule-Surface	convex after polishing		
Operating temperature	-40 °C / +85 °C		
Storage temperature	-40 °C / +90 °C		
Cable- Ø	3.5 mm		
Cable retention**	> 150 N		

* Loss depends on termination and fiber ** depends on cable

Stripping length

